





ENVISION

LINEAR PROFILE EXTRUSIONS


Imagine. Design. Inspire.




P. 4 Surface, Suspended




P. 5 Surface, Suspended




P. 6 Suspended




P. 7 Recessed




P. 8 Recessed




P. 9 Recessed




P. 10 Recessed







P. 11 Recessed



P. 12 Floor Recessed




P. 13 Floor Recessed

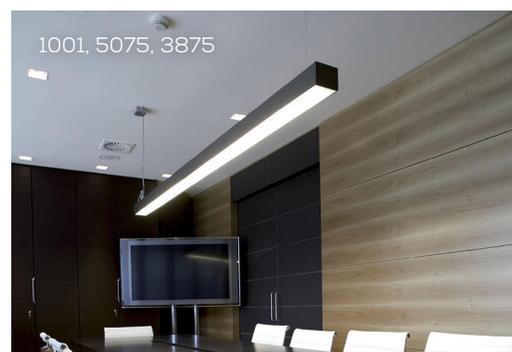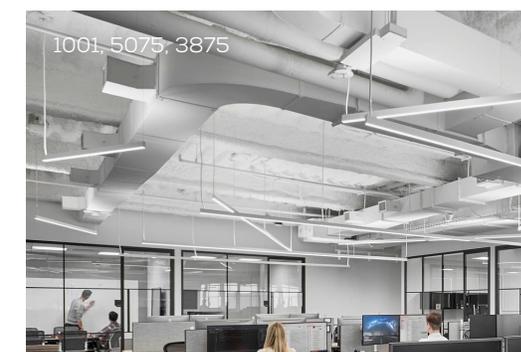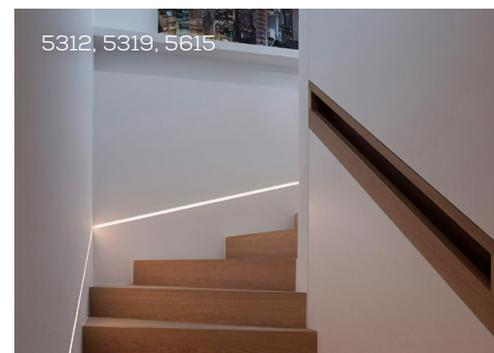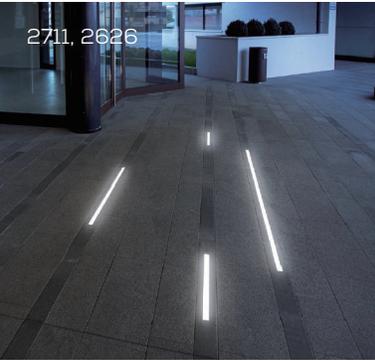


1001 PROFILE

Suspended Series

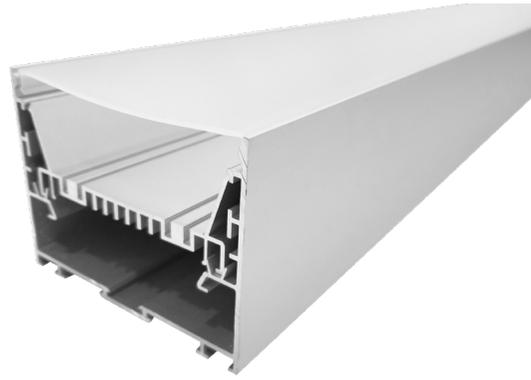

DIMENSIONS



A MODERN & ROBUST LUMINAIRE SYSTEM





This large and highly customizable linear system can be suspended or surface mounted, plus has a clean finish without visible screws.

FEATURES

- Compatible with LED engines up to 68mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



1001 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS
 <p>▶ 1001 - Silver</p>	 <p>O - Opaque Lens</p>	 <p>Custom length in segments of 12 to 196 inches.</p>	<p>2,195lm 12.8W/ft</p> <p> 27 - 2700K</p> <p> 30 - 3000K</p> <p> 40 - 4000K</p> <p> 50 - 5000K</p> <p> 60 - 6000K</p> <p> CCT - 2700-6500K</p> <p> RGB - RGB</p>	<p> IP20 - Dry Areas</p> <p> IP68 - Wet Areas</p>	 <p>▶ 65W AC100-277V</p> <p>3-in-1 dimming 0-10V, PWM, Rx</p>	<p> ▶ D - Surface Mount</p> <p> ▶ E - 6.5' Suspension</p>	<p> ▶ Z - 180° Connector</p> <p> ▶ I - 90° Connector</p> <p> J - X Module</p> <p> K - T Module</p> <p> L - L Module</p>
 PROFILE	 LENS	 LENGTH	 LIGHT	 USAGE	 DRIVER	 MOUNT	 PARTS

Mark "N/A" to signify options you do not need.

ITEM CODES


- | | | | |
|--|--|--|---|
|  12502 - Linear Extrusion |  12652 - 65W Driver |  12502-K - T Module |  12502-D - Surface Mount |
|  12502-G - Gear Tray |  12502-F - 180° Connectors |  12502-L - L Module |  12502-B - Inner Clip Kit |
|  12502-A - End Caps |  12502-I - 90° Connectors |  12502-E - 6.5' Suspension |  12502-C - Safety Cable |
|  12502-H - Frosted Lens |  12502-J - X Module |  12500-G - Hanging Ring | |

5075 PROFILE

Direct & Indirect Series



DIMENSIONS



TASK LIGHTING WITH AN AMBIENT TOUCH

You can suspend this fixture to take advantage of the discreet accent light, or surface mount it directly to your ceiling.

FEATURES

- Compatible with LED engines up to 26mm wide for front, 12mm wide for back.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



5075 PROFILE ORDERING SHEET

PROFILE	D-LENS	I-LENS	LENGTH	DIRECT	INDIRECT	USAGE	DRIVER	MOUNT	PARTS
 ▶ 5075 - Silver	 O - Opaque	 O - Opaque	 Custom length in segments of 10 to 196 inches.	1.250lm 7.7W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	655lm 3.8W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	▶ IP20 - Dry ▶ IP68 - Wet	▶ 23W AC100-277V ▶ 44W AC100-277V 3-in-1 dimming 0-10V, PWM, Rx	▶ D - Surface Mount ▶ E - 6.5' Suspension	▶ Z - 180° Conn. ▶ I - 90° Conn. J - X Module K - T Module L - L Module
 RAL № - Color Custom powder coating	 ▶ F - Frosted	 ▶ F - Frosted		*Lowest approximation based on 110lm/W CCT - Tunable RGB - RGB	*Lowest approximation based on 110lm/W CCT - Tunable RGB - RGB				
	 C - Clear	 C - Clear							
PROFILE	D-LENS	I-LENS	LENGTH	D-LIGHT	I-LIGHT	USAGE	DRIVER	MOUNT	PARTS


Mark "N/A" to signify options you do not need.

ITEM CODES


- | | | | | |
|---|--|--|--|---|
|  12500 - Linear Extrusion |  12651 - 23W Driver |  12500-L - T Module |  12500-D - Surface Mount |  12500-N - 3M Tape |
|  12500-H - Gear Tray |  12650 - 44W Driver |  12500-M - L Module |  12500-B - Inner Clip Kit |  12500-E - 6.5' Suspension |
|  12500-A - End Caps |  12500-F - 180° Connectors |  12500-K - X Module |  12500-C - Safety Cable |  12500-G - Hanging Ring |
|  12500-I - Frosted Direct |  12500-O - Frosted Indirect |  12500-J - 90° Connectors | | |

3875 PROFILE

Direct & Indirect Series

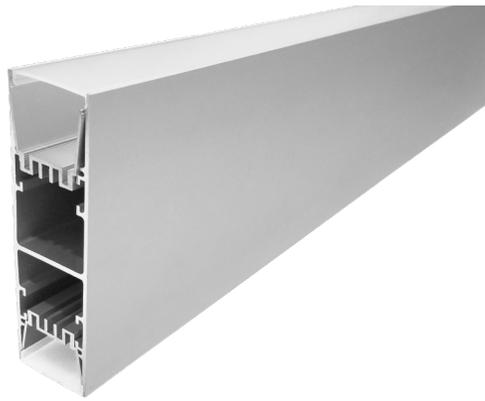

DIMENSIONS

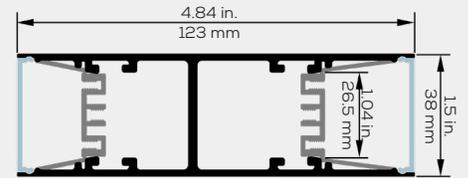

BALANCED DIRECT & INDIRECT LIGHT


A profile with indirect lighting in mind, this linear fixture is typically suspended for a unique blend of illumination and accent lighting.

FEATURES

- Compatible with LED engines up to 26mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



3875 PROFILE ORDERING SHEET

PROFILE	D-LENS	I-LENS	LENGTH	DIRECT	INDIRECT	USAGE	DRIVER	MOUNT	PARTS
 ▶ 3875 - Silver	 O - Opaque	 O - Opaque	 Custom length in segments of 10 to 196 inches.	1.250lm 7.7W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	1.250lm 7.7W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	 ▶ IP20 - Dry  ▶ IP68 - Wet	 ▶ 23W AC100-277V  ▶ 44W AC100-277V 3-in-1 dimming 0-10V, PWM, Rx	 ▶ D - 6.5' Suspension	 ▶ Z - 180° Conn.  ▶ I - 90° Conn.  J - X Module  K - T Module  L - L Module
 RAL N2 - Color Custom powder coating	 ▶ F - Frosted	 ▶ F - Frosted		 CCT - Tunable  RGB - RGB	 CCT - Tunable  RGB - RGB				
 C - Clear	 C - Clear								
PROFILE	D-LENS	I-LENS	LENGTH	D-LIGHT	I-LIGHT	USAGE	DRIVER	MOUNT	PARTS


Mark "N/A" to signify options you do not need.

ITEM CODES


- | | | | |
|---|--|---|---|
|  12501 - Linear Extrusion |  12501-H - Frosted Lens |  12501-K - T Module |  12501-D - 6.5' Suspension |
|  12501-F - Direct Gear Tray |  12651 - 23W Driver |  12501-L - L Module |  12500-G - Hanging Ring |
|  12501-G - Indirect Gear Tray |  12650 - 44W Driver |  12501-E - 180° Connectors |  12501-B - Inner Clip Kit |
|  12501-A - End Caps |  12501-J - X Module |  12501-I - 90° Connectors |  12501-C - Safety Cable |

7532 PROFILE

Recessed Series

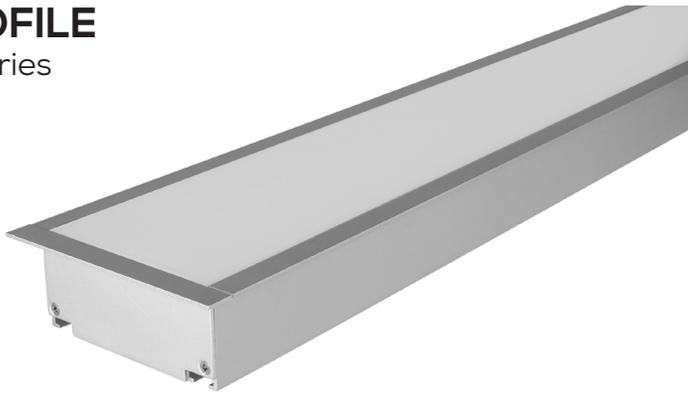

DIMENSIONS

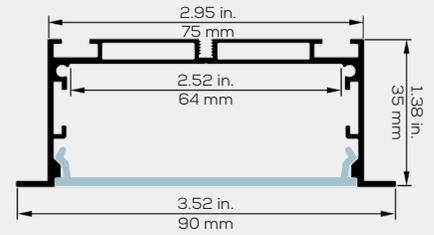

A SLIM EXTRUSION FOR TIGHT SPACES




This light is ideal for embedding in ceilings or walls with easy-to-install tension clips and a narrow trim to frame the lens face.

FEATURES

- Compatible with LED engines up to 64mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



7532 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT
 7532 - Silver	 O - Opaque Lens	 Custom length in segments of 8 to 196 inches.	1,850lm 11W/ft  27 - 2700K  30 - 3000K  40 - 4000K  50 - 5000K  60 - 6000K  CCT - 2700-6500K  RGB - RGB	 IP20 - Dry Areas  IP68 - Wet Areas	 69W AC100-240V 3-in-1 dimming 0-10V, PWM, Resistance	 B - Spring Clips
 RAL № - Any Color Custom powder coating	 F - Frosted Lens					
	 C - Clear Lens					
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT

Mark "N/A" to signify options you do not need.

ITEM CODES


-  **12509** - Linear Extrusion
-  **12509-B** - Spring Clip Set
-  **12509-A** - End Caps
-  **12500-N** - 3M Tape
-  **12509-C** - Frosted Lens
-  **12653** - 69W Driver

5032 PROFILE

Recessed Series



DIMENSIONS

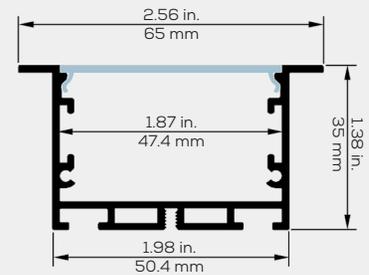

SHED LIGHT WITH A BOLD LINEAR PROFILE


This profile maximizes illumination and provides sufficient task lighting even when recessed in very high ceilings.

FEATURES

- Compatible with LED engines up to 42mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



5032 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS
 <p>▶ 5032 - Silver</p>	 <p>▶ O - Opaque Lens</p>	 <p>Custom length in segments of 8 to 196 inches.</p>	<p>1,520lm 11W/ft</p> <p>▶ 27 - 2700K</p> <p>▶ 30 - 3000K</p> <p>▶ 40 - 4000K</p> <p>▶ 50 - 5000K</p> <p>▶ 60 - 6000K</p> <p>730lm 8.6W/ft</p> <p>▶ CCT - 2700-6500K</p> <p>▶ RGB - RGB</p>	<p>▶ IP20 - Dry Areas</p> <p>▶ IP68 - Wet Areas</p>	 <p>▶ 30W AC120-277V</p>  <p>▶ 60W AC120-277V</p>  <p>▶ 96W AC120-277V</p> <p>5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer</p>	 <p>▶ B - Spring Clip Set</p>	 <p>▶ Z - 180° Connector</p>
 <p>▶ RAL № - Any Color Custom powder coating</p>	 <p>▶ F - Frosted Lens</p>						
	 <p>▶ C - Clear Lens</p>						
 <p>PROFILE</p>	 <p>LENS</p>	 <p>LENGTH</p>	 <p>LIGHT</p>	 <p>USAGE</p>	 <p>DRIVER</p>	 <p>MOUNT</p>	 <p>PARTS</p>


Mark "N/A" to signify options you do not need.

ITEM CODES


- | | | |
|--|--|--|
|  12503 - Linear Extrusion |  40662-A - 30W Driver |  12503-B - Spring Clip Set |
|  12503-A - End Caps |  40662-B - 60W Driver | |
|  12503-D - Frosted Lens |  40662-C - 96W Driver | |
|  40662-F - CCT Remote |  12503-C - 180° Connectors | |

5319 PROFILE

Recessed Series

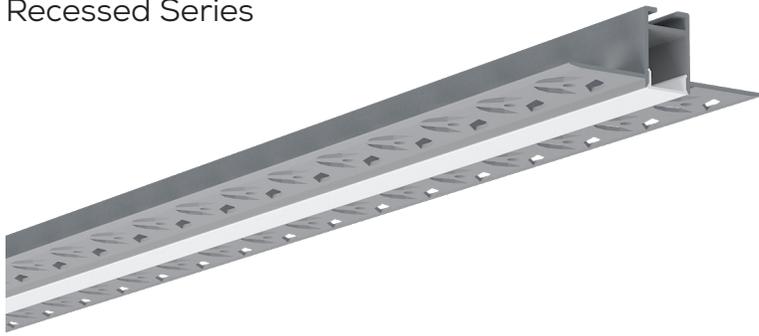

DIMENSIONS

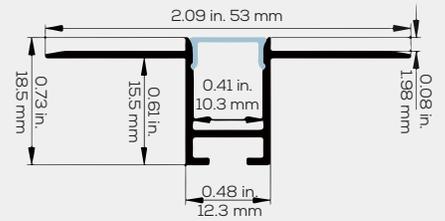


THE STANDARD RECESSED LIGHT SYSTEM


A profile that sets the standard when it comes to an embedded linear wall or ceiling light for any commercial or residential space.

FEATURES

- Compatible with LED engines up to 10mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.

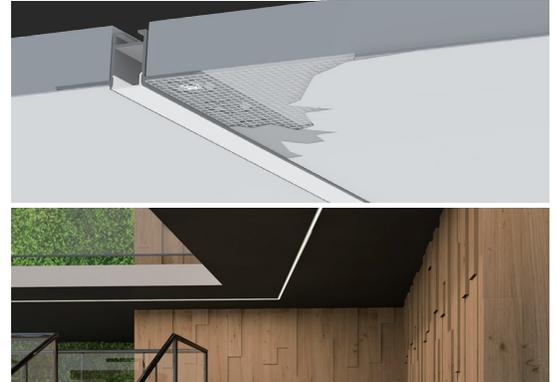

5319 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 ▶ 5319 - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	760lm 5.5W/ft  ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	 ▶ IP20 - Dry Areas ▶ IP68 - Wet Areas	 ▶ 30W AC120-277V  ▶ 60W AC120-277V  ▶ 96W AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 ▶ RAL № - Any Color Custom powder coating	 ▶ F - Frosted Lens		365lm 4.3W/ft  ▶ CCT - 2700-6500K  ▶ RGB - RGB		
	 C - Clear Lens				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER

Mark "N/A" to signify options you do not need.

ITEM CODES


- | | |
|--|---|
|  12506 - Linear Extrusion |  40662-A - 30W Driver |
|  12506-A - End Caps |  40662-B - 60W Driver |
|  12506-B - Frosted Lens |  40662-C - 96W Driver |
|  40662-F - CCT Remote | |

5615 PROFILE

Recessed Series



DIMENSIONS

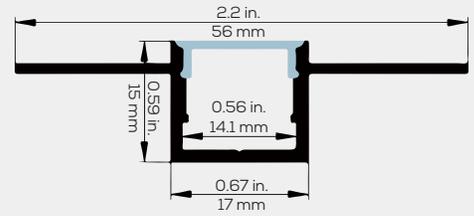


A RECESSED PROFILE FOR WIDER ENGINES


This extrusion has the internal space to accommodate more light source options than the other recessed profiles in this series.

FEATURES

- Compatible with LED engines up to 14mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.

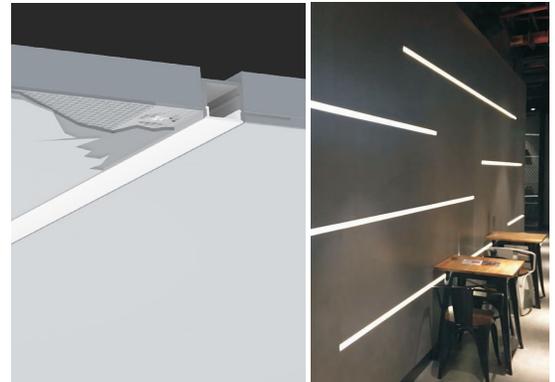

5615 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 ▶ 5615 - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	760lm 5.5W/ft  ▶ 27 - 2700K  ▶ 30 - 3000K  ▶ 40 - 4000K  ▶ 50 - 5000K  ▶ 60 - 6000K 365lm 4.3W/ft  ▶ CCT - 2700-6500K  ▶ RGB - RGB	 ▶ IP20 - Dry Areas ▶ IP68 - Wet Areas	 ▶ 30W AC120-277V  ▶ 60W AC120-277V  ▶ 96W AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 ▶ RAL № - Any Color Custom powder coating	 ▶ F - Frosted Lens  C - Clear Lens				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER


Mark "N/A" to signify options you do not need.

ITEM CODES


- | | |
|--|---|
|  12508 - Linear Extrusion |  40662-A - 30W Driver |
|  12508-A - End Caps |  40662-B - 60W Driver |
|  12508-B - Frosted Lens |  40662-C - 96W Driver |
|  40662-F - CCT Remote | |

5312 PROFILE

Recessed Series

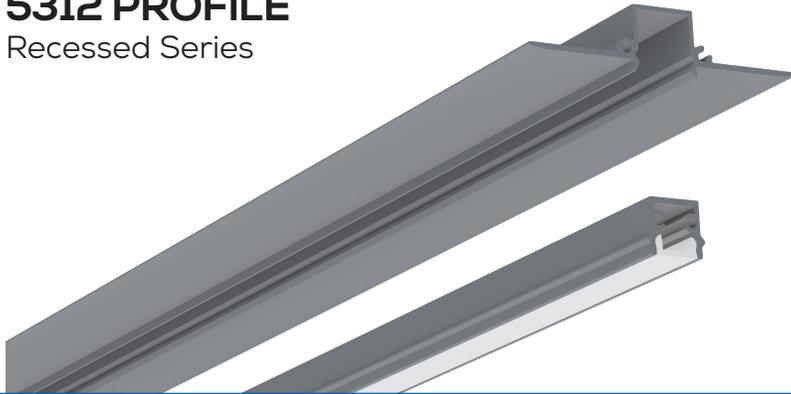

DIMENSIONS

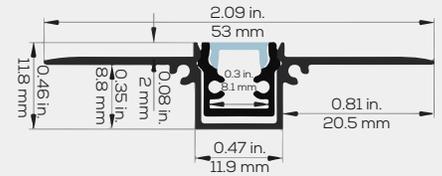

A DOUBLE PROFILE FOR EASY INSTALLATION



Once the main extrusion is installed into your surface, the separate interior channel can be placed inside after the dust has settled.

FEATURES

- Compatible with LED engines up to 6mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.



5312 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 ▶ 5312 - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	175lm 2.2W/ft  ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K CCT - 2700-6500K RGB - RGB	 ▶ IP20 - Dry Areas ▶ IP68 - Wet Areas	 ▶ 30W AC120-277V  ▶ 60W AC120-277V  ▶ 96W AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 ▶ RAL № - Any Color Custom powder coating	 ▶ F - Frosted Lens  C - Clear Lens				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER


Mark "N/A" to signify options you do not need.

ITEM CODES


-  **12507** - Linear Extrusion
-  **12507-B** - Gear Tray
-  **12507-A** - End Caps
-  **12507-C** - Frosted Lens
-  **40662-A** - 30W Driver
-  **40662-B** - 60W Driver
-  **40662-C** - 96W Driver

2626 PROFILE

Floor Recessed Series

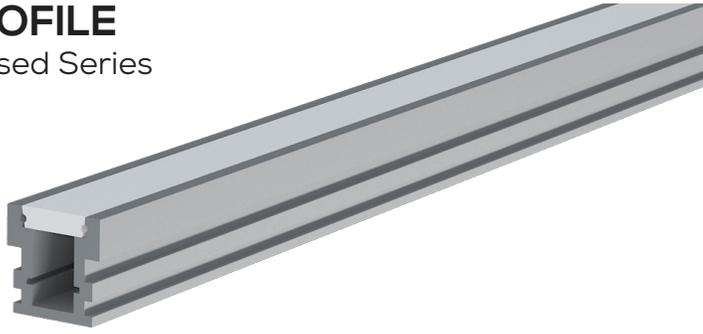

DIMENSIONS



A DURABLE EMBEDDED FLOOR LIGHT


This profile is flush to the ground and designed to withstand the pressure and impact of equipment passing on top of it.

FEATURES

- Compatible with LED engines up to 11mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.



2626 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 2626 - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	760lm 5.5W/ft  27 - 2700K  30 - 3000K  40 - 4000K  50 - 5000K  60 - 6000K 365lm 4.3W/ft  CCT - 2700-6500K  RGB - RGB	 IP20 - Dry Areas IP68 - Wet Areas	 30W AC120-277V  60W AC120-277V  96W AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 RAL N2 - Any Color <small>Custom powder coating</small>	 F - Frosted Lens				
	 C - Clear Lens				
 PROFILE	 LENS	 LENGTH	 LIGHT	 USAGE	 DRIVER

Mark "N/A" to signify options you do not need.

ITEM CODES


- | | |
|--|---|
|  12505 - Linear Extrusion |  40662-A - 30W Driver |
|  12505-A - End Caps |  40662-B - 60W Driver |
|  12505-B - Frosted Lens |  40662-C - 96W Driver |
|  40662-F - CCT Remote | |

2711 PROFILE

Floor Recessed Series



DIMENSIONS



A RAISED FLOOR LIGHT WITH EASE IN MIND



Meant to be easily embedded in the floor, this light is sturdy with a raised and beveled trim around its face.

FEATURES

- Compatible with LED engines up to 12mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



2711 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT
 ▶ 2711 - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	760lm 5.5W/ft  ▶ 27 - 2700K  ▶ 30 - 3000K  ▶ 40 - 4000K  50 - 5000K  ▶ 60 - 6000K 365lm 4.3W/ft  ▶ CCT - 2700-6500K  RGB - RGB	 ▶ IP20 - Dry Areas  ▶ IP68 - Wet Areas Single CCT: 370lm 4.4W/ft	 ▶ 30W AC120-277V  ▶ 60W AC120-277V  ▶ 96W AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer	 ▶ D - Mounting Clip
 RAL N2 - Any Color Custom powder coating	 ▶ F - Frosted Lens  C - Clear Lens					
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT

Mark "N/A" to signify options you do not need.

ITEM CODES

- | | |
|---|---|
|  12510 - Linear Extrusion |  40662-A - 30W Driver |
|  12510-A - End Caps |  40662-B - 60W Driver |
|  12510-B - Frosted Lens |  40662-C - 96W Driver |
|  40662-F - CCT Remote |  12510-C - Mounting Clip |

Draw your dream fixture below and let us make it a reality.





 855-997-2746  LED@SARINEnergy.com  SARINBlue.com